


Powerful Medical All in One PC

# MATE-2405

24" Fanless 9th Generation Core i7 Powerful Medical All in One PC

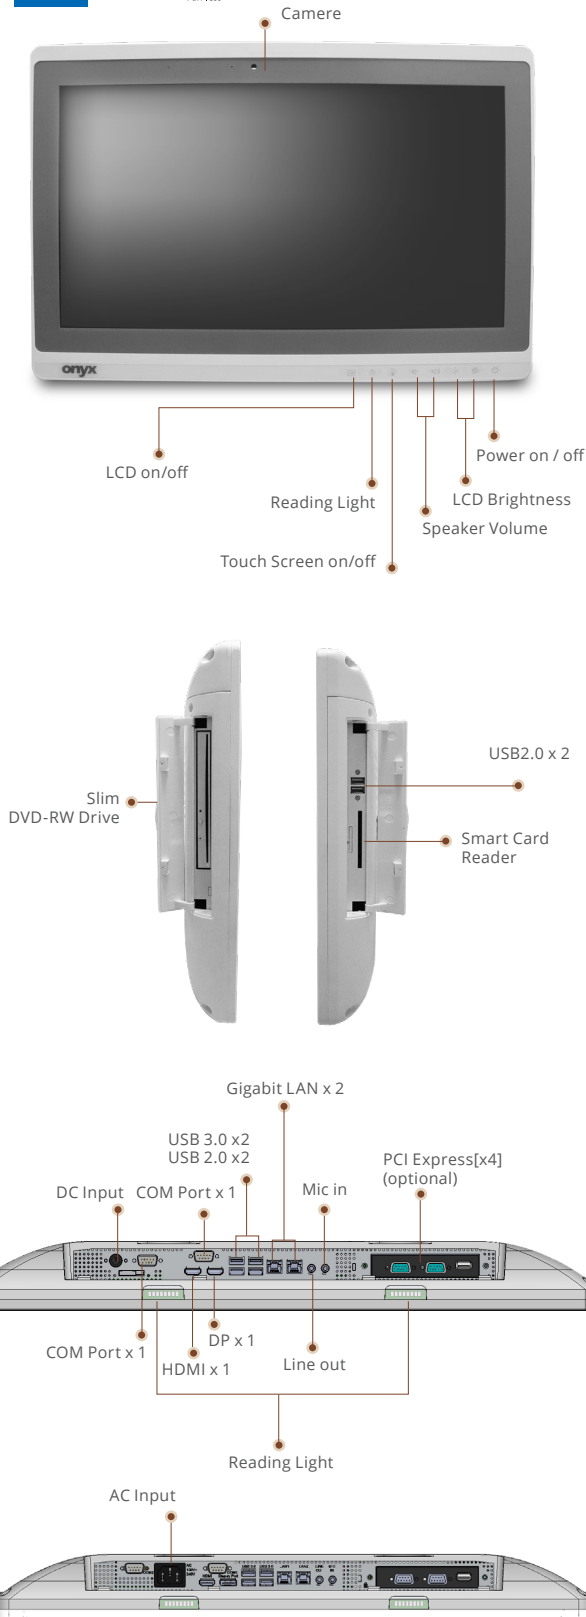

## Features

- Intel® 9th Generation Core™ i7/ i5 / i3 Processor
- Supports Dual Channel DDR4 2666 SODIMM up to 64GB
- 24" Full HD High Contrast MVA LCD
- Capacitive Multi-Touch Screen
- Two Gigabit Ethernet
- High Speed USB 3.0 Ports
- RS-232 x 2
- 5MP Camera with Mic (optional)
- PCI-Express x [4] x 1 (optional)
- 25Wh Backup Battery (optional)

## Specifications

### MAIN SPECIFICATIONS

Processor	Intel® 9th Generation Core i7-9700TE 8 Cores 3.8GHz Intel® 9th Generation Core i5-9500TE 6 Cores 3.6GHz
System Memory	Supports Dual Channel DDR4 2666 SODIMM up to 64GB
Chipset	Intel® H310
OS Support	Windows® 10, Linux®
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1 M.2 2242 SSD x 1 (optional) Slim DVD-RW Drive x 1 (optional)
Security	Trusted Platform Module 2.0 , RFID Reader (optional) Smart Card Reader x 1 (optional)
Wireless Communication	802.11 ac/a/b/g/n(optional), Bluetooth 4.1 / 5 (optional)
Speaker	5W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down LCD On/Off, Touch Screen On/Off, Reading Light On/Off
Power Requirement	DC 12V / DC 24V when backup battery is installed/ AC 80~264V

### DISPLAY

Size	24" LCD
Resolution	1920 x 1080
Luminance	250 nits
View Angle	178°(H)/178°(V)
Contrast Ratio	3000:1
Back Light Life Time	30,000 Hours
Touch Screen	Capacitive Multi-Touch

### I/O


USB	USB 3.0 x 4, USB 2.0 x 2
Serial Port	RS-232 x 2
Ethernet	1.5KV Isolated Gigabit LAN x 2
Video Out	Display Port 1.2 x1, HDMI 1.4b x 1 (Supports resolution up to 3840 x 2160)
Audio	Mic-in, Line-out

### MECHANICAL AND ENVIRONMENTAL

Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting VESA	75/100 mm
Degree of Protection	IP65 in the front ; IP54 in the back
Dimension	600 x 415 x 65mm
Package Size	790 x 220 x 550mm
Gross Weight	14 kg (30.86 lb)
Net Weight	9.2 kg(20.28 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

## 24" Fanless 9th Generation Core i7 Powerful Medial All in One PC

### Dimension / Unit: mm

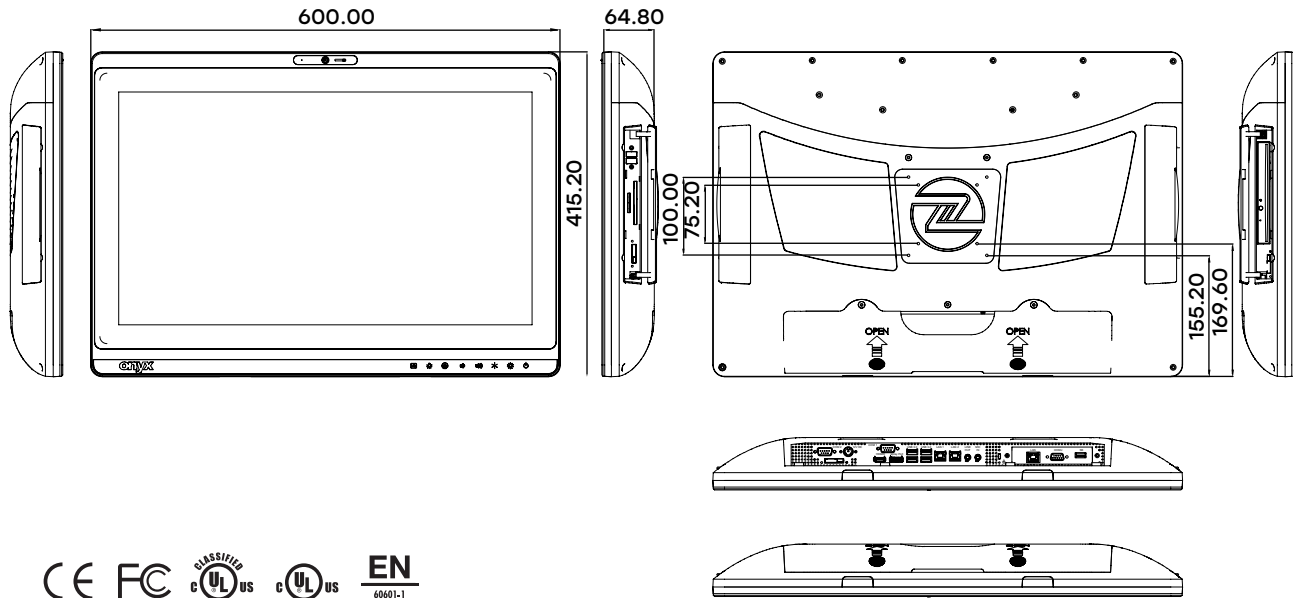

### Ordering Information

- MATE-2405-P2-A1-0010  
Medical Panel PC, 24" LCD, i7-9700TE, DC 12V, Capacitive Touch
- MATE-2405-P4-A1-0010  
Medical Panel PC, 24" LCD, i5-9500TE, DC 12V, Capacitive Touch
- MATE-2405-P2-B1-0010  
Medical Panel PC, 24" LCD, i7-9700TE, AC 80~264V, Capacitive Touch
- MATE-2405-P4-B1-0010  
Medical Panel PC, 24" LCD, i5-9500TE, AC 80~264V, Capacitive Touch
- MATE-2405-P2-A2-0010  
Medical Panel PC, 24" LCD, i7-9700TE, DC 12V, Capacitive Touch, Camera Shutter
- MATE-2405-P4-A2-0010  
Medical Panel PC, 24" LCD, i5-9500TE, DC 12V, Capacitive Touch, Camera Shutter
- MATE-2405-P2-B2-0010  
Medical Panel PC, 24" LCD, i7-9700TE, AC 80~264V, Capacitive Touch, Camera Shutter
- MATE-2405-P4-B2-0010  
Medical Panel PC, 24" LCD, i5-9500TE, AC 80~264V, Capacitive Touch, Camera Shutter

### Optional Accessories

- 1255301205  
Medical Power Adapter, 120W, 12V
- OPM-R03X-A1  
PCI Express[x1] Riser Kit
- OPM-R04X-A1  
PCI Express[x4] Riser Kit
- OPM-C12W-A6  
WLAN Kit, IEEE 802.11a/b/g/n/ac + Bluetooth 4.1
- OPM-C15W-A6  
WLAN Kit, IEEE 802.11a/b/g/n/ac + Bluetooth 5
- OPM-S03C-A2  
Smart Card Reader Kit
- OPM-P09C-A6  
25Wh Backup Battery
- OPM-T013-A2  
Slim Slot-in DVD-RW Drive
- OPM-C02C-A1  
Two Isolated RS-232 & One Isolated USB 2.0 PCIe Card
- OPM-C02C-A2  
Two Isolated RS-232 PCIe Card
- OPM-T017-A6  
Hot Swap Rack w/Lock Kit for 2.5" HDD/SSD
- OPM-S07R-A6  
RFID Reader Kit
- OPM-T004-A3  
5MP Camera with Mic